

NPA

New Product Announcement No. 2025-09



Multipurpose Solid Carbide Drills



KEY POINT

TaeguTec has introduced a new line of solid carbide drills, featuring the essential aspects of drilling.

TaeguTec's new solid carbide drill line offers greater versatility compared to the competition, delivering stable machining performance and excellent tool life across various materials.

The new line is available in diameters ranging from 3.0 to 12.0 mm, with drilling depths of 3xD and 5xD.

For further details, please contact the product manager.

Features

- 2 flute straight cutting edge for ideal drilling
- Superior machining tolerance enabling mass production
- Internal and external coolant type drills available
 - TED drills: external coolant type
 - TEO drills: internal coolant type
- Diameter range: 3.0-12.0 mm (in 0.1 mm increments)
- Drilling depths: 3xD (S type) and 5xD (R type)



Designation system

TED S051-6 TT5130

1

2

3

4

5


1 Drill type TED: External coolant
TEO: Internal coolant

2 Drilling depth S: 3xD
R: 5xD

3 Drill diameter


4 Shank diameter

5 Grade



TED

External coolant



TEO

Internal coolant



S type: 3xD



R type: 5xD

Availability

In stock

Price

Available in the GAL system

Sincerely,
TaeguTec

Sung Chang-ho

Hole-Making
Adviser

ADVANCECUTTING
TaeguTec

Sincerely,
TaeguTec

Suh Jang-hoon

Hole-Making Drill
Product Manager


TaeguTec
Member IMC Group

TED S

Solid carbide drills without oil holes



- Drilling depth: 3xdiameter

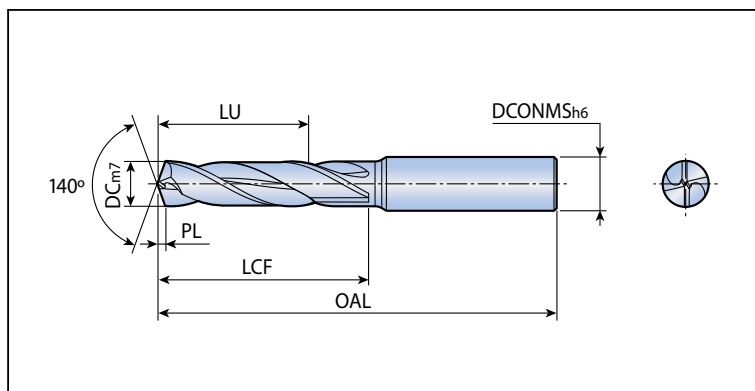

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TED S030-4	3.0	4	62	11	18	0.5	●
S031-4	3.1	4	62	11	18	0.5	●
S032-4	3.2	4	62	11	18	0.5	●
S033-4	3.3	4	62	11	18	0.5	●
S034-4	3.4	4	62	11	18	0.5	●
S035-4	3.5	4	62	11	18	0.6	●
S036-4	3.6	4	62	11	18	0.6	●
S037-4	3.7	4	62	11	18	0.6	●
S038-4	3.8	4	66	10	18	0.6	●
S039-4	3.9	4	66	10	18	0.6	●
S040-4	4.0	4	66	10	18	0.6	●
S041-5	4.1	5	66	19	27	0.7	●
S042-5	4.2	5	66	19	27	0.7	●
S043-5	4.3	5	66	19	27	0.7	●
S044-5	4.4	5	66	19	27	0.7	●
S045-5	4.5	5	66	19	27	0.7	●
S046-5	4.6	5	66	19	27	0.8	●
S047-5	4.7	5	66	19	27	0.8	●
S048-5	4.8	5	66	18	27	0.8	●
S049-5	4.9	5	66	18	27	0.8	●
S050-5	5.0	5	66	18	27	0.8	●
S051-6	5.1	6	66	22	31	0.8	●
S052-6	5.2	6	66	22	31	0.8	●
S053-6	5.3	6	66	22	31	0.8	●
S054-6	5.4	6	66	22	31	0.8	●
S055-6	5.5	6	66	22	31	0.9	●
S056-6	5.6	6	66	22	31	0.9	●
S057-6	5.7	6	66	22	31	0.9	●
S058-6	5.8	6	66	22	31	0.9	●
S059-6	5.9	6	66	22	31	0.9	●
S060-6	6.0	6	66	22	31	0.9	●
S061-7	6.1	7	79	26	37	1.0	●
S062-7	6.2	7	79	26	37	1.0	●
S063-7	6.3	7	79	26	37	1.0	●


●: Standard items

TED S

Solid carbide drills without oil holes



- Drilling depth: 3xdiameter

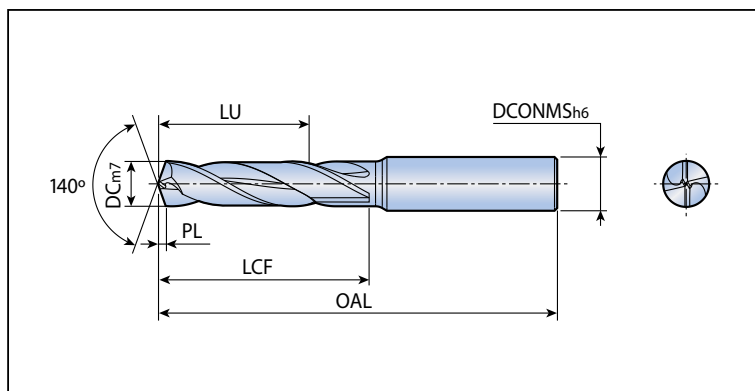

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TED S064-7	6.4	7	79	26	37	1.0	●
S065-7	6.5	7	79	26	37	1.0	●
S066-7	6.6	7	79	26	37	1.0	●
S067-7	6.7	7	79	26	37	1.1	●
S068-7	6.8	7	79	26	37	1.1	●
S069-7	6.9	7	79	26	37	1.1	●
S070-7	7.0	7	79	26	37	1.1	●
S071-8	7.1	8	79	28	41	1.1	●
S072-8	7.2	8	79	28	41	1.1	●
S073-8	7.3	8	79	28	41	1.1	●
S074-8	7.4	8	79	28	41	1.2	●
S075-8	7.5	8	79	28	41	1.2	●
S076-8	7.6	8	79	28	41	1.2	●
S077-8	7.7	8	79	28	41	1.2	●
S078-8	7.8	8	79	28	41	1.2	●
S079-8	7.9	8	79	28	41	1.3	●
S080-8	8.0	8	79	28	41	1.3	●
S081-9	8.1	9	89	32	45	1.3	●
S082-9	8.2	9	89	32	45	1.3	●
S083-9	8.3	9	89	32	45	1.3	●
S084-9	8.4	9	89	32	45	1.3	●
S085-9	8.5	9	89	32	45	1.3	●
S086-9	8.6	9	89	32	45	1.4	●
S087-9	8.7	9	89	32	45	1.4	●
S088-9	8.8	9	89	32	45	1.4	●
S089-9	8.9	9	89	32	45	1.4	●
S090-9	9.0	9	89	32	45	1.4	●
S091-10	9.1	10	89	35	48	1.4	●
S092-10	9.2	10	89	35	48	1.4	●
S093-10	9.3	10	89	35	48	1.5	●
S094-10	9.4	10	89	35	48	1.5	●
S095-10	9.5	10	89	35	48	1.5	●
S096-10	9.6	10	89	35	48	1.5	●
S097-10	9.7	10	89	35	48	1.5	●

●: Standard items

Solid carbide drills without oil holes




●: Standard items

TED R

Solid carbide drills without oil holes



- Drilling depth: 5xdiameter

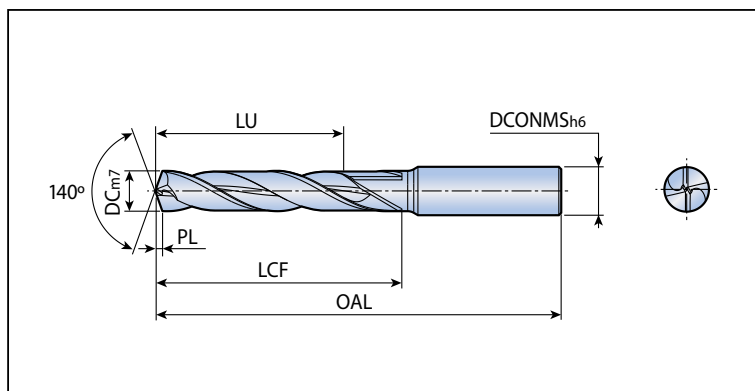

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TED R030-4	3.0	4	66	24	30	0.5	●
R031-4	3.1	4	66	24	30	0.5	●
R032-4	3.2	4	66	24	30	0.5	●
R033-4	3.3	4	66	24	30	0.5	●
R034-4	3.4	4	66	24	30	0.5	●
R035-4	3.5	4	66	24	30	0.6	●
R036-4	3.6	4	66	24	30	0.6	●
R037-4	3.7	4	66	24	30	0.6	●
R038-4	3.8	4	74	22	30	0.6	●
R039-4	3.9	4	74	22	30	0.6	●
R040-4	4.0	4	74	22	30	0.6	●
R041-5	4.1	5	74	32	40	0.7	●
R042-5	4.2	5	74	32	40	0.7	●
R043-5	4.3	5	74	32	40	0.7	●
R044-5	4.4	5	74	32	40	0.7	●
R045-5	4.5	5	74	32	40	0.7	●
R046-5	4.6	5	74	32	40	0.7	●
R047-5	4.7	5	74	32	40	0.8	●
R048-5	4.8	5	82	30	40	0.8	●
R049-5	4.9	5	82	30	40	0.8	●
R050-5	5.0	5	82	30	40	0.8	●
R051-6	5.1	6	82	35	45	0.8	●
R052-6	5.2	6	82	35	45	0.8	●
R053-6	5.3	6	82	35	45	0.8	●
R054-6	5.4	6	82	35	45	0.8	●
R055-6	5.5	6	82	35	45	0.9	●
R056-6	5.6	6	82	35	45	0.9	●
R057-6	5.7	6	82	35	45	0.9	●
R058-6	5.8	6	82	35	45	0.9	●
R059-6	5.9	6	82	35	45	0.9	●
R060-6	6.0	6	82	35	45	0.9	●
R061-7	6.1	7	91	37	48	1.0	●
R062-7	6.2	7	91	37	48	1.0	●
R063-7	6.3	7	91	37	48	1.0	●


●: Standard items

TED R

Solid carbide drills without oil holes




- Drilling depth: 5xdiameter

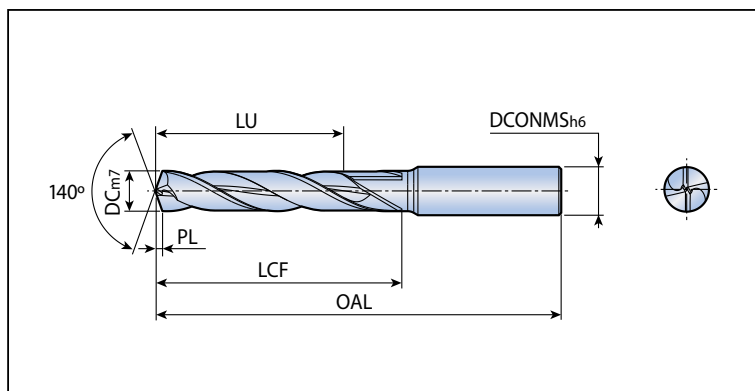

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TED R064-7	6.4	7	91	37	48	1.0	●
R065-7	6.5	7	91	37	48	1.0	●
R066-7	6.6	7	91	37	48	1.0	●
R067-7	6.7	7	91	37	48	1.1	●
R068-7	6.8	7	91	37	48	1.1	●
R069-7	6.9	7	91	37	48	1.1	●
R070-7	7.0	7	91	37	48	1.1	●
R071-8	7.1	8	91	42	53	1.1	●
R072-8	7.2	8	91	42	53	1.1	●
R073-8	7.3	8	91	42	53	1.1	●
R074-8	7.4	8	91	42	53	1.2	●
R075-8	7.5	8	91	42	53	1.2	●
R076-8	7.6	8	91	42	53	1.2	●
R077-8	7.7	8	91	42	53	1.2	●
R078-8	7.8	8	91	42	53	1.2	●
R079-8	7.9	8	91	42	53	1.3	●
R080-8	8.0	8	91	42	53	1.3	●
R081-9	8.1	9	103	46	59	1.3	●
R082-9	8.2	9	103	46	59	1.3	●
R083-9	8.3	9	103	46	59	1.3	●
R084-9	8.4	9	103	46	59	1.3	●
R085-9	8.5	9	103	46	59	1.3	●
R086-9	8.6	9	103	46	59	1.4	●
R087-9	8.7	9	103	46	59	1.4	●
R088-9	8.8	9	103	46	59	1.4	●
R089-9	8.9	9	103	46	59	1.4	●
R090-9	9.0	9	103	46	59	1.4	●
R091-10	9.1	10	103	50	63	1.4	●
R092-10	9.2	10	103	50	63	1.4	●
R093-10	9.3	10	103	50	63	1.5	●
R094-10	9.4	10	103	50	63	1.5	●
R095-10	9.5	10	103	50	63	1.5	●
R096-10	9.6	10	103	50	63	1.5	●
R097-10	9.7	10	103	50	63	1.5	●

●: Standard items

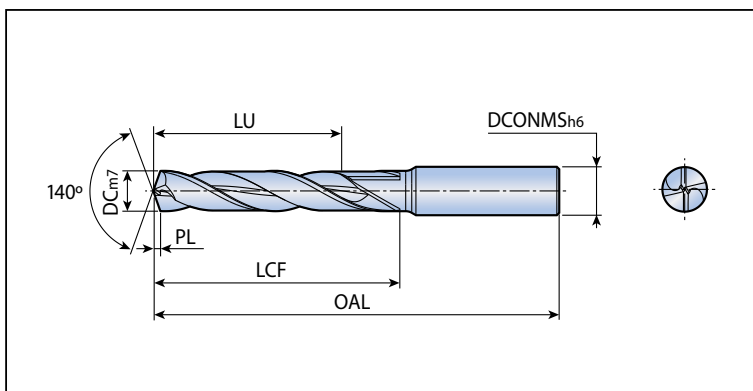[illegible]


●: Standard items

TEO S

Solid carbide drills with oil holes



- Drilling depth: 3xdiameter

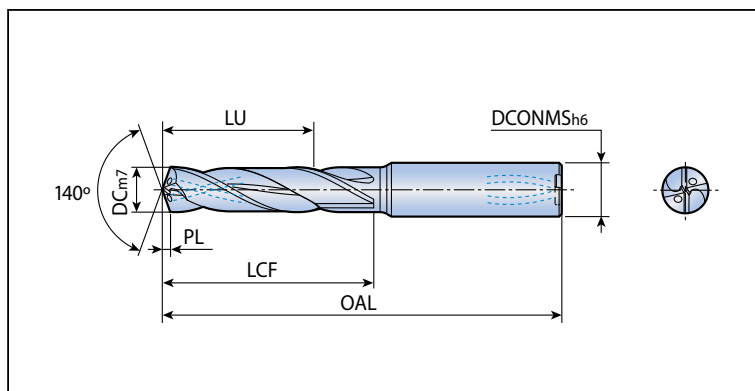

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TEO S030-6	3.0	6	62	11	18	0.5	●
S031-6	3.1	6	62	11	18	0.5	●
S032-6	3.2	6	62	11	18	0.5	●
S033-6	3.3	6	62	11	18	0.5	●
S034-6	3.4	6	62	11	18	0.5	●
S035-6	3.5	6	62	11	18	0.6	●
S036-6	3.6	6	62	11	18	0.6	●
S037-6	3.7	6	62	11	18	0.6	●
S038-6	3.8	6	66	10	18	0.6	●
S039-6	3.9	6	66	10	18	0.6	●
S040-6	4.0	6	66	10	18	0.6	●
S041-6	4.1	6	66	19	27	0.7	●
S042-6	4.2	6	66	19	27	0.7	●
S043-6	4.3	6	66	19	27	0.7	●
S044-6	4.4	6	66	19	27	0.7	●
S045-6	4.5	6	66	19	27	0.7	●
S046-6	4.6	6	66	19	27	0.8	●
S047-6	4.7	6	66	19	27	0.8	●
S048-6	4.8	6	66	18	27	0.8	●
S049-6	4.9	6	66	18	27	0.8	●
S050-6	5.0	6	66	18	27	0.8	●
S051-6	5.1	6	66	22	31	0.8	●
S052-6	5.2	6	66	22	31	0.8	●
S053-6	5.3	6	66	22	31	0.8	●
S054-6	5.4	6	66	22	31	0.8	●
S055-6	5.5	6	66	22	31	0.9	●
S056-6	5.6	6	66	22	31	0.9	●
S057-6	5.7	6	66	22	31	0.9	●
S058-6	5.8	6	66	22	31	0.9	●
S059-6	5.9	6	66	22	31	0.9	●
S060-6	6.0	6	66	22	31	0.9	●
S061-7	6.1	7	79	26	37	1.0	●
S062-7	6.2	7	79	26	37	1.0	●
S063-7	6.3	7	79	26	37	1.0	●


●: Standard items

TEO S

Solid carbide drills with oil holes



- Drilling depth: 3xdiameter

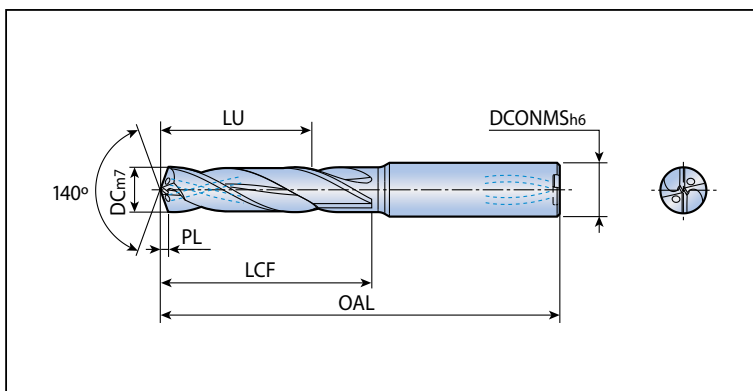

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TEO S064-7	6.4	7	79	26	37	1.0	●
S065-7	6.5	7	79	26	37	1.0	●
S066-7	6.6	7	79	26	37	1.0	●
S067-7	6.7	7	79	26	37	1.1	●
S068-7	6.8	7	79	26	37	1.1	●
S069-7	6.9	7	79	26	37	1.1	●
S070-7	7.0	7	79	26	37	1.1	●
S071-8	7.1	8	79	28	41	1.1	●
S072-8	7.2	8	79	28	41	1.1	●
S073-8	7.3	8	79	28	41	1.1	●
S074-8	7.4	8	79	28	41	1.2	●
S075-8	7.5	8	79	28	41	1.2	●
S076-8	7.6	8	79	28	41	1.2	●
S077-8	7.7	8	79	28	41	1.2	●
S078-8	7.8	8	79	28	41	1.2	●
S079-8	7.9	8	79	28	41	1.3	●
S080-8	8.0	8	79	28	41	1.3	●
S081-9	8.1	9	89	32	45	1.3	●
S082-9	8.2	9	89	32	45	1.3	●
S083-9	8.3	9	89	32	45	1.3	●
S084-9	8.4	9	89	32	45	1.3	●
S085-9	8.5	9	89	32	45	1.3	●
S086-9	8.6	9	89	32	45	1.4	●
S087-9	8.7	9	89	32	45	1.4	●
S088-9	8.8	9	89	32	45	1.4	●
S089-9	8.9	9	89	32	45	1.4	●
S090-9	9.0	9	89	32	45	1.4	●
S091-10	9.1	10	89	35	48	1.4	●
S092-10	9.2	10	89	35	48	1.4	●
S093-10	9.3	10	89	35	48	1.5	●
S094-10	9.4	10	89	35	48	1.5	●
S095-10	9.5	10	89	35	48	1.5	●
S096-10	9.6	10	89	35	48	1.5	●
S097-10	9.7	10	89	35	48	1.5	●


●: Standard items

TEO R

Solid carbide drills with oil holes



- Drilling depth: 5xdiameter

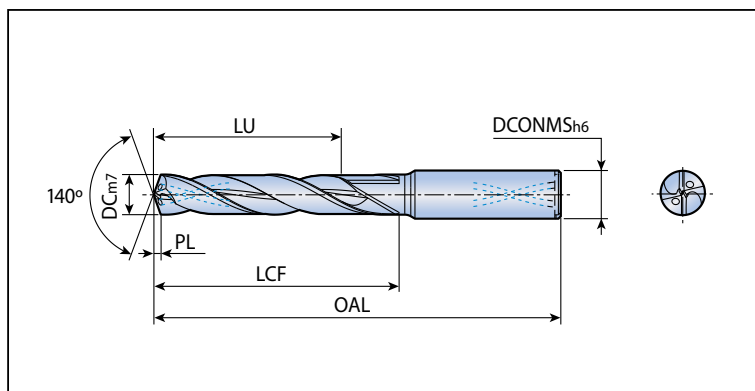

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TEO R030-6	3.0	6	66	24	30	0.5	●
R031-6	3.1	6	66	24	30	0.5	●
R032-6	3.2	6	66	24	30	0.5	●
R033-6	3.3	6	66	24	30	0.5	●
R034-6	3.4	6	66	24	30	0.5	●
R035-6	3.5	6	66	24	30	0.6	●
R036-6	3.6	6	66	24	30	0.6	●
R037-6	3.7	6	66	24	30	0.6	●
R038-6	3.8	6	74	22	30	0.6	●
R039-6	3.9	6	74	22	30	0.6	●
R040-6	4.0	6	74	22	30	0.6	●
R041-6	4.1	6	74	32	40	0.7	●
R042-6	4.2	6	74	32	40	0.7	●
R043-6	4.3	6	74	32	40	0.7	●
R044-6	4.4	6	74	32	40	0.7	●
R045-6	4.5	6	74	32	40	0.7	●
R046-6	4.6	6	74	32	40	0.7	●
R047-6	4.7	6	74	32	40	0.8	●
R048-6	4.8	6	82	30	40	0.8	●
R049-6	4.9	6	82	30	40	0.8	●
R050-6	5.0	6	82	30	40	0.8	●
R051-6	5.1	6	82	35	45	0.8	●
R052-6	5.2	6	82	35	45	0.8	●
R053-6	5.3	6	82	35	45	0.8	●
R054-6	5.4	6	82	35	45	0.8	●
R055-6	5.5	6	82	35	45	0.9	●
R056-6	5.6	6	82	35	45	0.9	●
R057-6	5.7	6	82	35	45	0.9	●
R058-6	5.8	6	82	35	45	0.9	●
R059-6	5.9	6	82	35	45	0.9	●
R060-6	6.0	6	82	35	45	0.9	●
R061-7	6.1	7	91	37	48	1.0	●
R062-7	6.2	7	91	37	48	1.0	●
R063-7	6.3	7	91	37	48	1.0	●


●: Standard items

TEO R

Solid carbide drills with oil holes



- Drilling depth: 5xdiameter

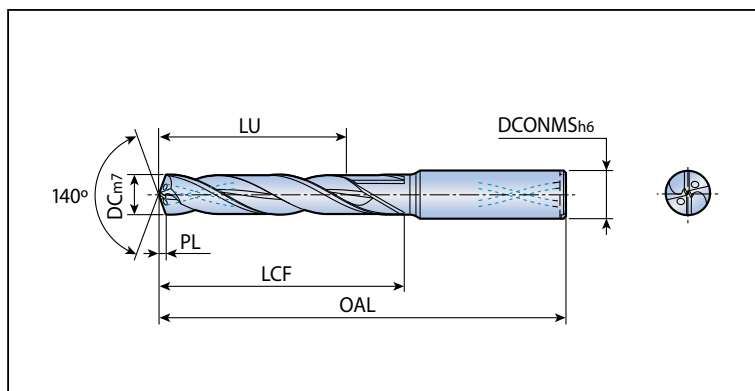

Designation	Dimension (mm)						Grade
	DC	DCONMS	OAL	LU	LCF	PL	TT5130
TEO R064-7	6.4	7	91	37	48	1.0	●
R065-7	6.5	7	91	37	48	1.0	●
R066-7	6.6	7	91	37	48	1.0	●
R067-7	6.7	7	91	37	48	1.1	●
R068-7	6.8	7	91	37	48	1.1	●
R069-7	6.9	7	91	37	48	1.1	●
R070-7	7.0	7	91	37	48	1.1	●
R071-8	7.1	8	91	42	53	1.1	●
R072-8	7.2	8	91	42	53	1.1	●
R073-8	7.3	8	91	42	53	1.1	●
R074-8	7.4	8	91	42	53	1.2	●
R075-8	7.5	8	91	42	53	1.2	●
R076-8	7.6	8	91	42	53	1.2	●
R077-8	7.7	8	91	42	53	1.2	●
R078-8	7.8	8	91	42	53	1.2	●
R079-8	7.9	8	91	42	53	1.3	●
R080-8	8.0	8	91	42	53	1.3	●
R081-9	8.1	9	103	46	59	1.3	●
R082-9	8.2	9	103	46	59	1.3	●
R083-9	8.3	9	103	46	59	1.3	●
R084-9	8.4	9	103	46	59	1.3	●
R085-9	8.5	9	103	46	59	1.3	●
R086-9	8.6	9	103	46	59	1.4	●
R087-9	8.7	9	103	46	59	1.4	●
R088-9	8.8	9	103	46	59	1.4	●
R089-9	8.9	9	103	46	59	1.4	●
R090-9	9.0	9	103	46	59	1.4	●
R091-10	9.1	10	103	50	63	1.4	●
R092-10	9.2	10	103	50	63	1.4	●
R093-10	9.3	10	103	50	63	1.5	●
R094-10	9.4	10	103	50	63	1.5	●
R095-10	9.5	10	103	50	63	1.5	●
R096-10	9.6	10	103	50	63	1.5	●
R097-10	9.7	10	103	50	63	1.5	●

●: Standard items

Solid carbide drills with oil holes



●: Standard items

Recommended cutting conditions

Cutting data for TED / TEO

ISO	Material	Condition	Tensile Strength (N/mm ²)	Hardness HB	Material No.	Cutting speed Vc(m/min)	Feed (mm/rev) vs. drill diameter		
							Ø3 - Ø5	Ø5.1 - Ø8	Ø8.1 - Ø12
P	Non-alloy steel and cast steel, free cutting steel	<0.25%C Annealed	420	125	1	80-120	0.10-0.20	0.15-0.25	0.20-0.30
		≥0.25%C Annealed	650	190	2	80-110	0.10-0.20	0.15-0.25	0.20-0.30
		<0.55%C Quenched and tempered	850	250	3	70-100	0.10-0.20	0.15-0.25	0.20-0.30
		≥0.55%C Annealed	750	220	4	70-100	0.10-0.20	0.15-0.25	0.20-0.30
		Quenched and tempered	1000	300	5	70-100	0.10-0.20	0.15-0.25	0.20-0.30
	Low alloy steel and cast steel (less than 5% of alloying elements)	Annealed	600	200	6	70-90	0.10-0.20	0.15-0.25	0.20-0.30
			930	275	7	70-90	0.10-0.20	0.15-0.25	0.20-0.30
		Quenched and tempered	1000	300	8	50-80	0.10-0.20	0.15-0.25	0.20-0.30
			1200	350	9	40-70	0.10-0.20	0.15-0.25	0.20-0.30
	High alloy steel, cast steel and tool steel	Annealed	680	200	10	50-80	0.08-0.18	0.10-0.20	0.15-0.25
		Quenched and tempered	1100	325	11	40-70	0.08-0.18	0.10-0.20	0.15-0.25
M	Stainless steel and cast steel	Ferritic / martensitic	680	200	12	30-60	0.06-0.12	0.10-0.15	0.12-0.18
		Martensitic	820	240	13	30-60	0.06-0.12	0.10-0.15	0.12-0.18
		Austenitic	600	180	14	30-60	0.06-0.12	0.10-0.15	0.12-0.18
K	Grey cast iron (GG)	Ferritic / pearlitic		160	15	65-80	0.10-0.20	0.15-0.25	0.20-0.30
		Pearlitic		250	16	65-80	0.10-0.20	0.15-0.25	0.20-0.30
	Cast iron nodular (GGG)	Ferritic		180	17	85-105	0.10-0.20	0.15-0.25	0.20-0.30
		Pearlitic		260	18	75-90	0.10-0.20	0.15-0.25	0.20-0.30
	Malleable cast iron	Ferritic		130	19	65-80	0.10-0.20	0.15-0.25	0.20-0.30
		Pearlitic		230	20	65-80	0.10-0.20	0.15-0.25	0.20-0.30
N	Aluminum-wrought alloy	Not cureable		60	21	70-200	0.10-0.25	0.15-0.35	0.25-0.45
		Cured		100	22	70-200	0.10-0.25	0.15-0.35	0.25-0.45
	Aluminum-cast, alloyed	<=12% Si Not cureable		75	23	70-200	0.10-0.25	0.15-0.35	0.25-0.45
		Cured		90	24	70-200	0.10-0.25	0.15-0.35	0.25-0.45
		>12% Si High temperature		130	25	70-150	0.10-0.25	0.15-0.35	0.25-0.45
	Copper alloys	>1% Pb Free cutting		110	26	70-200	0.08-0.18	0.15-0.25	0.20-0.35
		Brass		90	27	70-200	0.08-0.18	0.15-0.25	0.20-0.35
		Electrolitic copper		100	28	70-200	0.08-0.18	0.15-0.25	0.20-0.35
	Non-metallic	Duroplastics, fiber plastics		70 Shore D	29				
		Hard rubber		55 Shore D	30				
S	High temp. alloys	Fe based	Annealed	200	31	15-40	0.02-0.08	0.04-0.10	0.06-0.12
			Cured	280	32	15-40	0.02-0.08	0.04-0.10	0.06-0.12
		Ni or Co based	Annealed	250	33	15-40	0.02-0.08	0.04-0.10	0.06-0.12
			Cured	350	34	15-40	0.02-0.08	0.04-0.10	0.06-0.12
			Cast	320	35	15-40	0.02-0.08	0.04-0.10	0.06-0.12
	Titanium and Ti alloys	Pure	Rm 400	190	36				
		Alpa+bata alloys cured	Rm 1050	310	37				
H	Hardened steel	Hardened		55HRC	38	10-40	0.02-0.08	0.04-0.10	0.06-0.12
		Hardened		60HRC	39	10-40	0.02-0.08	0.04-0.10	0.06-0.12
	Chilled cast iron	Cast		400	40				
	Cast iron nodular (GGG)	Hardened		55HRC	41				

■ Steel
 ■ Stainless steel
 ■ Cast iron
 ■ Nonferrous
 ■ High temp. alloys
 ■ Hardened steel